


HY-ALERTA® 5320

INTRINSICALLY SAFE (IS) HYDROGEN AREA MONITOR

H2scan®
Advanced Hydrogen Sensing

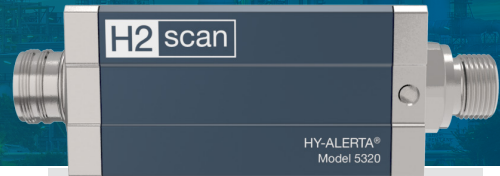

Rapid Response Hydrogen Leak Detection Improves Safety

The HY-ALERTA® 5320 Hydrogen Area Monitor integrates proprietary technology to enhance safety in environments vulnerable to hydrogen leaks. Featuring H2scan's self-calibrating, patented solid-state technology, the HY-ALERTA 5320 ensures reliable and rapid detection of hydrogen-specific leaks. Its fast response time promptly alerts facility managers to the presence of hydrogen, enabling immediate corrective action.

Key Features

- **Effortless Installation:** Compact form factor and versatile mounting options (surface, wall, ceiling) facilitate easy installation in facilities producing, storing, or utilizing hydrogen
- **Broad Application:** Ideal for hydrogen-based process lines, gas blending operations, energy storage, fuel cell/electrolyzer facilities, data centers, and battery rooms, enabling real-time, continuous hydrogen monitoring
- **Intrinsically Safe:** Designed for safety with an intrinsically safe product and a ten-year sensor warranty

Benefits

- **Maintenance-Free Operation:** H2scan's hydrogen sensing technology eliminates frequent calibrations and ongoing maintenance, providing flexibility in monitor placement without accessibility concerns
- **Enhanced Safety:** Ensures safety in potentially explosive environments with the industry's fastest and most reliable hydrogen-specific monitor

Upgrade Your Hydrogen Safety Program with a Complete Solution

Long-term sensor reliability maintenance-free operation:

The hydrogen sensing element ensures reliability without cross-sensitivity to other combustible gases

Safe and effective, ideal for hazardous environments: This product is suitable for hydrogen-based process lines, fuel cell/ electrolyzer facilities, battery rooms, and energy storage, providing rapid leak detection

Cost-effective because of low cost of ownership: Eliminates periodic calibration, maintenance, and replacement costs

Maintenance-free due to patented solid-state sensor technology: Includes a 10-year sensor warranty with no calibration required, allowing flexible placement in critical areas without maintenance concerns

Environmentally friendly as there are no consumables required: Supports environmentally sustainable operations

27215 Turnberry Lane, Unit A, Valencia, CA 91355, USA | +1 661-775-9575 | hello@h2scan.com | www.h2scan.com | 90000230



HY-ALERTA® 5320


INTRINSICALLY SAFE HYDROGEN AREA MONITOR



- **Enhance Worker Safety and Protect Capital Equipment:** Deploy reliable, rapid, and cost-effective hydrogen sensing technology for hazardous applications across industries involved in the hydrogen economy
- **No False Alarms:** Eliminates cross-sensitivity to other gases
- **Low Total Cost of Ownership:**
 - Zero manual calibration requirements
 - Zero maintenance
 - Zero consumables like calibration gases
 - Zero sensor replacements
- **100% Continuous Monitoring**
- **Sensor-Linking Capability**
- **Versatile Interface Standards and Alarm Outputs**
- **Ideal for Space-Constrained Areas:** Effective leak detection in compact environments

This technology ensures efficient operations and safety enhancements crucial for industries embracing hydrogen based technologies.

HY-ALERTA 5320 Dimensions

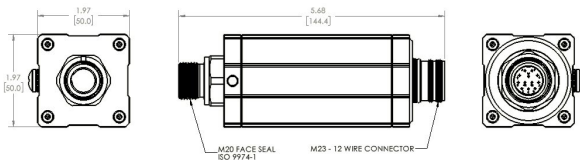

Measurement Specifications

Model	Hydrogen Range		T90 Response Time (sec)	Accuracy	Drift/Week	Repeatability
	Low	High				
5320	0.4%	5%	<60	0.3%	None	0.3%

Product Specifications

Operating Conditions

Operating Pressure (Hazardous Location)	0.95 - 1.1 ATM Absolute
Process Gas Temperature	See Product Selection Table Below
Operating Humidity	< 95% RH (non-condensing)

Input/Output Signal

Digital Communication	Modbus over RS-485, three-wire, half-duplex
Relays	2 digital optocouplers
Analog	4-20 mA

Power

Input Voltage	10 to 15.6 VDC
Input Power	2 W

Physical

Dimensions	144.4 x 50 x 50 mm (5.68 x 1.97 x 1.97 in)
Weight	748.43 g (1.65 lbs)
Electrical Fitting	Twelve-Pin M23
Sensor Fitting	M20 face seal, ISO 9974-1

Environmental

Ingress Protection	IP66
Operating Temperature	-40°C to 70°C (-40°F to 158°F)
Storage Temperature	-40°C to 105°C (-40°F to 221°F)

Certifications

US/CAN	Class I, Div. 1 & Class I, Div. 2, Groups B,C, and D
ATEX	Ex II 1G + H ₂ Ga
IECEx	Ex ia (H ₂) Ga

Hazardous location electrical barriers must be purchased separately

* Note: Analyzers are factory calibrated at 1 ATM Absolute

Specifications subject to change without notice
12.25 © 2022-2025 H2scan

27215 Turnberry Lane, Unit A, Valencia, CA 91355, USA | +1 661-775-9575 | hello@h2scan.com | www.h2scan.com | 90000230

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Office North America:

Angst+Pfister North America Inc.
10391 Brecksville Rd.
US-Brecksville, OH 44141
Phone +1 440 375-5212
info.apus@angst-pfister.com

Scan here and get an overview of personal contacts!



<https://sensorsandpower.angst-pfister.com/en/>
